



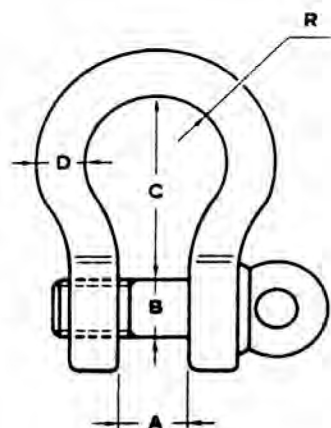

**Perno filettato**

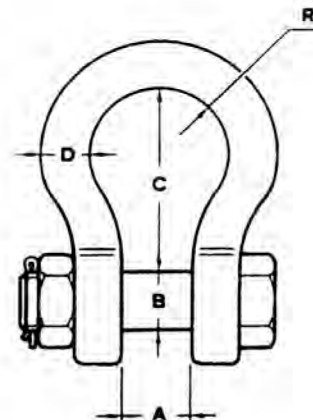

**Dado copiglia**

| PORTATA<br>TON. | D<br>mm | B<br>mm | A<br>mm | C<br>mm | 2R<br>mm | PESO Kg            |                  |
|-----------------|---------|---------|---------|---------|----------|--------------------|------------------|
|                 |         |         |         |         |          | PERNO<br>FILETTATO | DADO<br>COPIGLIA |
| 0,75            | 9       | 10      | 13,5    | 32      | 21       | 0,11               | 0,13             |
| 1               | 10      | 11      | 16      | 36      | 26       | 0,15               | 0,17             |
| 1,5             | 11      | 12      | 18      | 43      | 29       | 0,21               | 0,25             |
| 2               | 13      | 16      | 22      | 48      | 35       | 0,37               | 0,44             |
| 3,25            | 16      | 20      | 27      | 59      | 43       | 0,65               | 0,79             |
| 4,75            | 20      | 23      | 32      | 69      | 51       | 1,06               | 1,26             |
| 6,5             | 22      | 26      | 36      | 83      | 58       | 1,56               | 1,88             |
| 8,5             | 25      | 28      | 43      | 95      | 68       | 2,32               | 2,78             |
| 9,5             | 28      | 33      | 46      | 108     | 75       | 3,28               | 3,87             |
| 12              | 32      | 36      | 52      | 115     | 83       | 4,51               | 5,26             |
| 13,5            | 35      | 39      | 57      | 133     | 92       | 5,93               | 6,94             |
| 17              | 38      | 42      | 60      | 146     | 99       | 7,89               | 8,79             |
| 25              | 45      | 50      | 74      | 178     | 126      | 13,40              | 14,99            |
| 35              | 50      | 60      | 83      | 197     | 146      | 18,85              | 20,65            |
| 42,5            | 57      | 65      | 95      | 222     | 160      | 26,06              | 29,01            |
| 55              | 65      | 70      | 105     | 254     | 185      | 37,86              | 41,05            |
| 85              | 75      | 80      | 127     | 330     | 190      | 58,68              | 62,24            |
| 120             | 89      | 95      | 146     | 381     | 238      | -                  | 110              |

- Coefficiente di sicurezza : 5:1
- Finitura zincati

- Materiale: staffa acciaio al carbonio perno acciaio legato
- Anche con Norme U.S. Federal Specification RR-C-271

**L A G U N A F U N I**