


Campanella tipo CM


per uso con catena e fune



Catena Ø mm		Codice	Dimensioni secondo mm			Peso Kg	W.L.L. Kg
L	V		D	P	L		
7	6	CMX 0706	13	110	60	0,34	2000
8	7	CMX 0807	16	110	60	0,53	2500
10	8	CMX 1008	18	135	75	0,915	4000
13	10	CMX 1310	22	160	90	1,60	6700
16	13	CMX 1613	26	180	100	2,46	10000
18	16	CMX 1816	32	200	110	4,14	14000
20	18	CMX 2018	36	260	140	6,22	17500
22	20	CMX 2220	40	300	160	8,95	22400
26	22	CMX 2622	45	340	180	12,82	26600
32	26	CM 3226	50	350	190	16,55	31500
36	32	CM 3632	60	400	200	27,01	45000
40	36	CM 4036	60	400	200	27,01	56000


Campanella tipo CMC/CNC

per uso catena

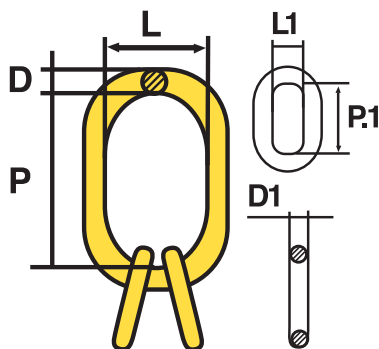


Catena Ø mm	Codice	(con schiaccia- mento)	Dimensioni secondo mm							Peso Kg	W.L.L. Kg
			D	P	L	D1	P1	L1	SxX		
6	CMCX 06		18	135	75	13	54	25		1,315	2000
7	CMCX 07		18	135	75	13	54	25		1,315	4000
8	CMCX 08		22	160	90	16	70	34		2,32	5300
10	CMCX 10		26	180	100	18	85	40		3,52	8000
13	CMCX 13		32	200	110	22	115	50		6,26	14000
16	CMCX 16		36	260	140	26	140	65		9,56	21200
20	CMCX 20		50	350	190	33	150	70		22,65	33600
22	CMCX 22		50	350	190	36	170	75		25,19	39900
7	CNC 07	CNCS 07	20	160	95	14	120	70	8x25	2,90	5500
8	CNC 08	CNCS 08	23	160	110	16	140	80	8x25	3,10	6650
10	CNC 10	CNCS 10	27	190	110	20	160	95	11,5x35	5,00	9400
13	CNC 13	CNCS 13	33	230	130	27	190	110	14x45	10,00	14200
16	CNC 16	CNCS 16	38	275	150	33	230	130	18x45	17,00	22300
20	CNC 20		45	340	180	38	275	150		27,80	33500
22	CNC 22		50	350	190	45	340	180		42,20	40800
26	CNC 26		60	400	200	50	350	190		60,10	56800

Catene grado 100



Diametro	Portata max ton*	Dim. in mm			Peso appr. Kg
		D	P	L (min)	
06	1,4	6	18	7,8	0,9
07	1,9	7	21	9,1	1,2
08	2,5	8	24	10,4	1,6
10	4	10	30	13	2,5
13	6,7	13	39	16,9	4,2
16	10	16	48	20,8	6,2
20	16	20	60	26	10
22	19	22	66	28,6	11,9
26	26,5	26	78	33,8	16,3
32	40	32	96	41,6	24,3

Maglie di giunzione tipo CLX



Tipo	Portata max ton*	Per catene di mm	Dim. in mm						Peso appr. Kg
			A	C	O	R	P	S	
6	1,4	6	14	18	18	40	8	7,5	0,07
7	1,9	7	17,8	20	20,5	50,5	10,2	9	0,14
8	2,5	8	19	25,5	23,5	62	11,5	10	0,20
10	4	10	23,8	30	27,5	72	12,6	12,6	0,35
13	6,7	13	28	36	33,3	87,3	19	16,7	0,74
16	10	16	34,3	40,5	39,5	105	20,6	20,6	1,16
20	16	20	42	46	46	113	29	25	2,50
22	19	22	49	55	58	133	30	28	3,10
26	26,5	26	57	85	70	192	40	30	6,80
32	40	32	80	84,5	94,1	206	47	35	11,5


La sicurezza nel sollevamento
con catene e componenti

Gancio con linguetta tipo OGKNL




Tipo	Portata max ton*	Per catene di mm	Dim. in mm							Peso appr. Kg
			A	A1	D	G	H	O	R	
OGKNL 6-10	1,4	6	26	19	10	16	20	20,5	81	0,25
OGKNL 8-10	2,5	7-8	33	26	11	19	29	25	101	0,50
OGKNL 10-10	4	10	40	31	16	26	33	34	131	0,97
OGKNL 13-10	6,7	13	51	40	19	33	42	43	159	1,90
OGKNL 16-10	10	16	56	45	24,5	40	50	50	183	3,30
OGKNL 20-10	16	20	60	52	27	48	53	55	203	4,50
OGKNL 22-10	19	22	70	62	29	50	60	60	224	7,10
OGKNL 26-10	26,5	26	77	73	35	60	75	70	257	12
OGKNL 32-10	40	32	95	87	39	71	89	76	259	27

Gancio per braghe con linguetta tipo GKNL




Tipo	Portata max ton*	Per catene di mm	Dim. in mm								Peso appr. Kg
			A	A1	B	C	G	H	R	PxL	
GKNL 6-10	1,4	6	26	19	7,2	8	15	20	69	7,5x17,5	0,25
GKNL 8-10	2,5	8	34	26	9,5	10	19	28	95	10x22,5	0,5
GKNL 10-10	4	10	40	31	12	13,5	25	33	110	13x29,5	1
GKNL 13-10	6,7	13	51	40	15	17	30	40	136	16x37	1,7
GKNL 16-10	10	16	56	45	18	22	37	48	155	20x52	3,2
GKNL 20-10	16	20	60	53	23	26	51	52	185	24x73	5
GKNL 22-10	19	22	70	62	25	29	50	63	210	26x72	12,3

Gancio di sicurezza con sicura ad incastro tipo OBKL




Tipo	Portata max ton*	Per catene di mm	Dim. in mm							Peso appr. Kg
			A	D	G	H	O	R	T	
OBKL 6-10	1,4	6	28	11	16	21	21	109	35	0,5
OBKL 8-10	2,5	7-8	34	12	20	26	25	135	43	0,95
OBKL 10-10	4	10	45	16	25	30	33	168	56	1,65
OBKL 13-10	6,7	13	51	20	35	40	40	205	69	3,25
OBKL 16-10	10	16	60	27	36	50	50	251	80	6,1
OBKL 20-10	16	20	70	30	60	67	60	290	90	9,8
OBKL 22-10	19	22	80	32	62	70	70	322	100	14,4

Gancio di sicurezza tipo BKGL




Tipo	Portata max ton*	Per catene di mm	Dim. in mm								Peso appr. Kg
			A	B	C	G	H	R	T	PxL	
BKGL 6-10	1,4	6	28	7	8	16	21	94	35	7,5x17,5	0,5
BKGL 8-10	2,5	8	34	9	10	20	26	123	43	10x22,5	0,95
BKGL 10-10	4	10	45	12	14	25	30	143	56	13x31,5	1,6
BKGL 13-10	6,7	13	51	15	17	35	40	180	69	16x42	3,2
BKGL 16-10	10	16	60	19	19	36	50	215	80	21x51,5	6
BKGL 20-10	16	20	70	23	26	60	67	253	90	24x73	9,8
BKGL 22-10	19	22	82	26	32	62	70	287	100	26x72	14,4

Gancio per fonderia tipo OKE




Tipo	Portata max ton*	Per catene di mm	Dim. in mm						Peso appr. Kg
			L	B	E	F	G	H	
OKE- 8-10	2,5	7,8	124	63	28	12	21	26	0,8
OKE- 10-10	4	10	151	76	34	15	26	30	1,4
OKE- 13-10	6,7	13	184	90	44	19	33	39	2,8
OKE- 16-10	10	16	218	102	56	23	40	46	4,9
OKE- 20-10	16	20	247	114	60	27	46	60	7,2
OKE- 22-10	20	22	275	120	64	31	60	70	11,3
OKE- 26-10	27	26	300	113	70	35	64	77	16

Mezza campanella (chiusa) tipo SKG




Tipo	Portata max ton*	Per catene di mm	Dim. in mm			Peso appr. Kg
			L	B	G	
SKG-7/8-8	2,0	7,8	99	50	14	0,3
SKG-10-8	3,2	10	127	66	18	0,6
SKG-13-8	5,4	13	145	72	22	1,1
SKG-16-8	8,0	16	175	82	25	1,7
SKG-18/20-8	12,5	19	204	105	30	2,8

Tornichetto isolato tipo SKLI




Tipo	Portata max ton*	Per catene di mm	Dim. in mm		Peso appr. Kg
			L	D	
SKLI-7/8-8	2,0	7,8	75	48	0,7
SKLI-10-8	3,15	10	96	59	1,4
SKLI-13-8	5,3	13	120	75	2,9
SKLI-16-8	8,0	16	137	90	4,9
SKLI-18/20-8	12,5	19	159	104	7,2

Giunto per catene Berglok tipo BLL




Tipo	Portata max ton*	Per catene di mm	Dim. in mm				Peso appr. Kg
			L	B	G	H	
BLL-7/8-8	2,0	7,8	35	25	11	18	0,2
BLL-10-8	3,2	10	45	32	14	22	0,4
BLL-13-8	5,4	13	56	40	17	28	1,0
BLL-16-8	8,0	16	68	50	22	35	1,4
BLL-19-8	11,5	19	80	58	25	41	2,3

Gancio bloccamaglia tipo GGL



Tipo	Portata max ton*	Per catene di mm	Dim. in mm								Peso appr. Kg
			A	B	C	G	H	R	M	PxL	
GGL 6-10	1,4	6	8	8	8,8	22	22	51,5	35,5	7,5x17,5	0,2
GGL 8-10	2,5	8	10	10	10,9	30	28	66	47	10x22,5	0,44
GGL 10-10	4	10	13	13	15	44	34	79,9	55	13x31,5	0,96
GGL 13-10	6,7	13	17	17	17,5	53	47	105,4	81	16x42	2,1
GGL 16-10	10	16	19	19	18,3	64	60	111,8	92	21x51,5	3,4
GGL 20-10	16	20	23,5	23	22	85	65	118	100	24x61,5	5,2
GGL 22-10	19	22	26	26	25	92	68	154	120	26x72	7,8

Gancio bloccamaglia tipo OGL



Tipo	Portata max ton*	Per catene di mm	Dim. in mm							Peso appr. Kg
			A	D	G	H	O	R	M	
OGL 6-10	1,4	6	8	8,5	22	22	13,5	53,5	35,5	0,18
OGL 8-10	2,5	8	10	11	30	28	17	70	47	0,40
OGL 10-10	4	10	13	15	44	34	22	86,5	55	0,88
OGL 13-10	6,7	13	17	18	53	47	26	110,5	81	1,95
OGL 16-10	10	16	19	21	64	60	32	129	92	3,20
OGL 20-10	16	20	23,5	23	85	64	39	153,5	100	4,9
OGL 22-10	19	22	26	30	87	71	42	184	115	7,5
OGL 26-10	26,5	26	30,5	36	100	90	55	213	127	13
OGL 32-10	40	32	38,5	44	160	112	59	245	200	30,5

La sicurezza nel sollevamento
con catene e componenti